


4-step access, pneumatic

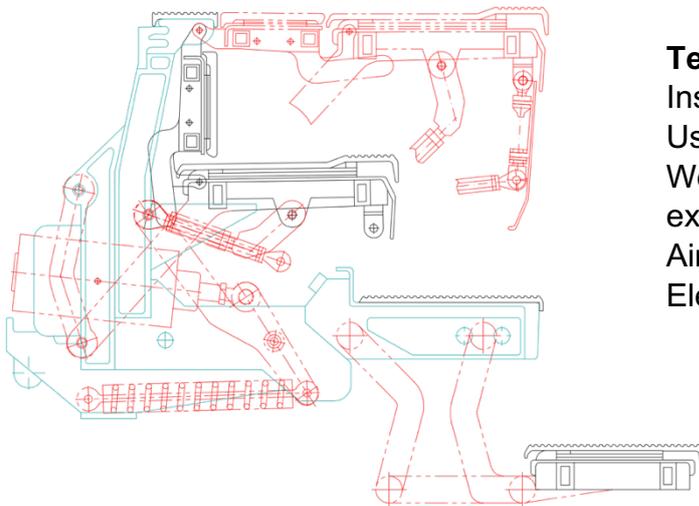

Technical data

Installation Width:	1300	mm
Usefull width:	1270	mm
Weight:	185	kg
extension time:	3	s
Air supply:	5	bar
Electricconnection:	24	VDC

Options

- Also available with a installation width of 650 mm
- Electric driven version upon request

General

- Installation in vehicle-side niche
- Low maintenance version
- Emergency actuation function

Summary

The four-step access consists of an upper folding step, a fixed middle step and a lowerswivelling step. The upper folding step comprises essentially a two-part footplate which forms a single level with the vehicle floor when retracted. When lowered the two-part footplate folds down to form an angle, while the rear part of the footplate is vertical.

The front part of the footplate drops horizontally and forms the third step, which is 220 mm below floor height. 220 mm lower down the second footplate is installed as a fixed step. A further 220 mm lower down the horizontally swivelling step is installed and as the first footplate it forms the bottom step.